

JULIUS ALSANDOR
MAYOR



Perfectly Seasoned.

105 NORTH MAIN ST.
P.O. BOX 1879
OPELOUSAS, LA 70571-1879
(337) 948-2520
FAX (337) 948-2593

LEGAL NOTICE ADVERTISEMENT FOR BIDS

Notice is hereby given that sealed bids will be received by the Mayor and Board of Aldermen of the City of Opelousas, Louisiana, at the City Hall Municipal Plaza, 105 N. Main Street, of said City up to the hour of 5:00 o'clock p.m. on

Tuesday, March 8, 2022

and then and there publicly opened and read aloud for furnishing of the following to wit:

Bid #01-22

UNIFORMS FOR THE POLICE DEPARTMENT

Specifications may be examined or obtained at the office of the City Clerk of the City of Opelousas, Louisiana during the office hours from Monday through Friday of any week or online on the City of Opelousas website at www.cityofopelousas.com and at <https://lamats.eauctionservices.com/>.

Bids may be submitted in sealed envelope addressed to the City Clerk of the City of Opelousas, Louisiana before the above-mentioned time and date.

Bids may also be submitted electronically through LaMATS e-Auction Services (EASiBUY) <https://lamats.eauctionservices.com/>.

All potential bidders may register at the website address at no charge to access the full specifications and to receive email notification of changes to the solicitation.

A \$300.00 Electronic Platform Fee will be payable upon award by the awarded vendor whether having submitted a bid by sealed envelope or electronically.

The City of Opelousas reserves the right to reject any and all bids and to waive informalities or irregularities in bids received.

DONE AND SIGNED at Opelousas, Louisiana, on this 8th day of February 2022.

ATTEST:

/s/ Julius Alsandor
MAYOR

/s/ Leisa S. Anderson
CITY CLERK

Pub. 2T, 02/16/2022, 02/20/2022

ALDERMEN

MARVIN RICHARD, ALDERMAN AT LARGE · MILTON BATISTE, DISTRICT A · FLOYD FORD, DISTRICT B · CHARLES CUMMINGS, DISTRICT C
SHERELL ROBERTS, DISTRICT D · CHASITY DAVIS, DISTRICT E

An Equal Opportunity/Affirmative Action Employer

JULIUS ALSANDOR
MAYOR



Perfectly Seasoned.

105 NORTH MAIN ST.
P.O. BOX 1879
OPELOUSAS, LA 70571-1879
(337) 948-2520
FAX (337) 948-2593

INSTRUCTIONS TO BIDDERS
BIDS FOR UNIFORMS FOR THE POLICE DEPARTMENT (BID #01-22)
MARCH 8, 2022 @ 5:00 P.M.

Specifications may be examined or obtained at the office of the City Clerk of the City of Opelousas, Louisiana during the office hours from Monday through Friday of any week or online at <https://lamats.eauctionservices.com/>.

Bids may be submitted in sealed envelope addressed to the City Clerk of the City of Opelousas, Louisiana before the above-mentioned time and date.

MAILED TO:

CITY OF OPELOUSAS
CITY CLERK'S OFFICE
P. O. BOX 1879
OPELOUSAS, LA 70571-1879

HAND-DELIVERED TO:

CITY OF OPELOUSAS
CITY CLERK'S OFFICE @ CITY HALL
105 N. MAIN STREET
OPELOUSAS, LA 70570

Bids may also be submitted electronically through LaMATS e-Auction Services (EASiBUY) <https://lamats.eauctionservices.com/>.

All potential bidders may register at the website address at no charge to access the full specifications and to receive email notification of changes to the solicitation.

A \$300.00 Electronic Platform Fee will be payable upon award by the awarded vendor whether having submitted a bid by sealed envelope or electronically.

The City of Opelousas reserves the right to reject any and all bids and to waive informalities or irregularities in bids received.

SEALED AND ELECTRONIC BIDS WILL BE OPENED AND READ ALOUD ON TUESDAY, MARCH 8, 2022, AT 5:00 P.M. AT THE REGULAR MEETING OF THE MAYOR AND BOARD OF ALDERMEN IN THE MEETING ROOM AT CITY HALL MUNICIPAL PLAZA, 105 N. MAIN STREET.

ALDERMEN

MARVIN RICHARD, ALDERMAN AT LARGE · MILTON BATISTE, DISTRICT A · FLOYD FORD, DISTRICT B · CHARLES CUMMINGS, DISTRICT C
SHERELL ROBERTS, DISTRICT D · CHASTITY DAVIS, DISTRICT E

An Equal Opportunity/Affirmative Action Employer

INSTRUCTIONS TO BIDDERS

1. Supplier of uniforms are given notice that uniform samples must meet approval of the buyer as to material, quality, color, and fit.
2. If bidding other than specified items, samples of items submitted will be provided along with complete set of detailed manufacturing specifications. Failure to supply samples and specifications if bidding other than specified items will be grounds for rejection.
3. All proposals shall be on forms attached.
4. There will be no minimum number of items purchased.
5. Items not worn ^{may} be exchanged at no charge.
6. Vendor should be an established uniform company, with a retail location with uniform inventory to service officers' needs within three to five days. The vendor should have a sales staff, and an alteration staff to assist officers on a walk in basis. There should be a location in a 25 mile radius of the area for accessibility to the officers during the contract period.
7. Over size charges for uniforms must be listed for any item that is applicable.
8. No freight or delivery charges for the police department.
9. The city of Opelousas is exempt from sales tax.
10. The uniform bid will be awarded to one vendor to assure consistency in color, quality, and delivery.
11. Bid consists of 33 pages.
12. Prices are for a one year period, with an option to renew for one additional year if agreed between the police department and vendor (supplier).
13. Bid number _____ should be placed on outside of sealed envelope, with date of opening, and "Police Uniform Bid" printed.

BID RE-CAP SHEET

<u>ITEMS</u>	<u>PRICE</u>	<u>OVERSIZE CHARGE</u>
1. Long sleeve shirt, white with piggy back trim, each _____, unstitched epaulets, gold P buttons Brand Bid _____ Style # _____		
2. Short sleeve shirt, white with piggy back trim, each _____, unstitched epaulets, gold P buttons Brand Bid _____ Style # _____		
3. Long sleeve shirt, navy with piggy back trim, each _____, unstitched Brand Bid _____ Style # _____		
4. Short sleeve shirt, navy with piggy back trim, each _____, unstitched epaulets Brand Bid _____ Style # _____		
5. Long sleeve shirt, navy polyester, wool, lycra each _____, Brand Bid _____ Style # _____		
6. Short sleeve shirt, navy polyester, wool, lycra each _____, Brand Bid _____ Style # _____		
7. Pant, polyester, wool, lycra each _____, Brand Bid _____ Style # _____		
8. Raincoat, reversible, black/hi-vis yellow each _____, Brand Bid _____ Style # _____		
9. Rain slicker, 3 piece reversible, black/hi-vis yellow, with hood, pant Brand Bid _____ Style # _____	each <u>N/A</u> , <u>N/A</u>	
10. Jacket, water proof, wind proof, with hood and pull down reflective panels Brand Bid _____ Style # _____	each _____,	

Southeastern Shirt Code "9" Shirt Specifications
Made In U.S.A.

Mens Long Sleeve Styles Z9103 White with Piggy Back Flaps & Straps

FABRIC

Made of 100% Polyester, texurized woven. Weight 7.25 oz per yard. We use the finest fabrics from Burlington Industries and Milliken & Company.

FRONTS

Left front to have a self fabric center pleat 1 1/2" wide extending from collar band to bottom of shirt held down with two rows of stitching. The center pleat to be lined with 100% polyester, 250 denier. Right front to have 1" wide button stay of self fabric extending from collar band to bottom of shirt. Buttons shall be securely attached to the button stay and shall correspond to the buttonholes on the center pleat. There shall be six front and one collar button. The shirt is to have sewn in permanent military creases, 1 in each front and 3 in the back.

COLLAR

The collar and band to be die cut to insure uniformity. The back of the stand is to measure 1 1/2". The points, wide spread, are to be 3 1/4" on length and topstitched 1/4" from edge. The interlinings are to be 100% polyester. Permanent collar stays of proper length are to be sewn inside the collar so that no stitches are made thru the bottom leaf.

YOKE

Two piece yoke of self goods to measure approximately 3 3/4" at bottom center of band.

SLEEVES

To be straight and whole. Sleeve vent shall have a top facing 1 1/4" wide finished at the top with a neatly blocked point. The lower facing to measure 1/2" in width. Sleeve placket to have one button and buttonhole

placed approximately 2 1/2" above the top of cuff. Sleeves must be secured to the body of the shirt by means of an over edge and a safety stitch so as to strengthen the seam. The same stitch must be on the side closing seam as well.

CUFFS

Barrel type cuffs to measure 3" wide with rounded corners and topstitched 1/4" around edge. Buttons on cuff to be evenly spaced as to prevent puckering when fastened. To be die cut for uniformity. Cuffs to be attached to sleeves by double stitching 1/4" apart visible on outside of cuff.

POCKETS

To have two breast pockets with mitred corners to finish 5 1/2" wide and 5 3/4" long. The left breast pocket to have a pencil opening about 1 3/8". Both pockets to have a 1 1/2" box pleat stitched top and bottom to prevent spreading. Velcro placed on edges.

PIGGY BACK FLAPS

Flaps to be die creased to give uniform shape and size. Flaps scoloped, to finish 5 3/4" in width and 2 1/2" in length at the sides, 2 3/4" at the center. Bottom ply to be made of navy material (Milliken style #7430 2008) and must be die creased larger to show approximately 1/8" at sides and bottom of flap. Flaps to be secured to front of shirt approximately 1/2" above top of pocket. The left flap to have a pencil opening about 1 3/8" in width. Velcro to be placed on corners of each flap to correspond with velcro on pockets. Flap shall be lined with a good grade and quality interlining.

BADGE TABS

Inside sling type of self goods approximately 1 1/2" wide to extend from joining seam to pocket of left front. To have two small uncut buttonholes 1 1/4" apart with the lower buttonhole approximately 1 1/4" above flap.

PIGGY BACK SHOULDER STRAPS

To be die creased to give uniforms shape and size. To be sewn into sleevehead seam and measure approximately 2" tapering to 1 3/4" with end pointed. Straps to be made with bottom ply of navy material (Milliken style #7430 2008). Bottom ply die creased larger to show approximately 1/8" navy material around entire edge of strap. Straps to be set approximately 1"

from collar seam. They shall be box stitched to shoulders with a row of cross stitching 2" from sleevehead and diagonally sewn from each end of seam to the sleeve. To be lined with 100% polyester interlining.

COLLAR STAYS

The collar stays shall be of good quality staler vinyl, of proper length.

INTERLININGS

Collar, centerfacing, flaps, and straps will be of 100% polyester interlinings.

SIZE MARKING

Size tab to be sewn in with neck label to the inside yoke of shirt.

BUTTONS

All buttons shall be made from thermosetting polyester material and must match fabric.

PRESSING AND PACKING

Shirts shall be carefully pressed by hand in a first class manner. Shirts to be shipped in strong boxes so as not to be damaged in shipment. Shirts to be packed in individual polyethylene bags.

LADIES SHIRTS

Ladies to have same features as mens except on a ladies pattern.

ZIPPER FRONT SHIRTS

To be YKK nylon separating zipper with nylon coil, matching binder seam, coordinated color for all components, all molded plastic. The zipper is to be sandwiched between fronts and to extend from the second to the sixth buttonhole with the stitch to be concealed under the center strip.

Southeastern Shirt Code "9" Shirt Specifications
Made In U.S.A.

Mens Short Sleeve Styles Z9203 White with Piggy Back Flaps & Straps

FABRIC

Made of 100% Polyester, texturized woven. Weight 7.25 oz. per yard. We use the finest fabrics from Burlington Industries and Milliken & Company.

FRONTS

Left front to have a self fabric center pleat 1 1/2" wide extending from collar band to bottom of shirt held down with two rows of stitching. The center pleat to be lined with 100% polyester, 250 denier. Right and left fronts to have an approximately 3" turn back extending from collar to bottom of shirt. There shall be six front and one collar button. The shirt is to have sewn in permanent military creases, 1 in each front and 3 in the back.

COLLAR

The collar is to be die cut. Convertible collar is to measure 3 1/4" long at points and topstitched 1/4" from edge. The interlinings are to be 100% polyester. Permanent collar stays of proper length are to be sewn inside the collar so that no stitches are made thru the bottom leaf.

YOKE

Two piece yoke of self goods to measure approximately 3 3/4" at bottom center of band.

SLEEVES

Sleeves are to be one piece, have a 1" hem and finish 9 1/2" to 9 3/4" long from the shoulder seam. Sleeve setting and closing shall be done with an overedge and safety stitch. The sleeve is to be bartacked at the hem

POCKETS

To have two breast pockets with mitred corners to finish 5 1/2" wide and 5 3/4" long. The left breast pocket to have a pencil opening about 1 3/8". Both pockets to have a 1 1/2" box pleat stitched top and bottom to prevent spreading. Velcro placed on edges.

PIGGY BACK FLAPS

Flaps to be die creased to give uniform shape and size. Flaps to be scoloped , top ply to finish 5 3/4" in width and 2 1/2" in length at the sides, 2 3/4" at the center. Bottom ply to be made of navy material (Milliken style #7430 2008) and must be die creased larger to show approximately 1/8" at sides and bottom of flap. Flaps to be secured to front of shirt approximately 1/2" above top of pocket. The left flap to have a pencil opening about 1 3/8" in width. Velcro to be placed on corners of each flap to correspond with velcro on pockets. Flap shall be lined with a good grade and quality interlining.

BADGE TABS

Inside sling type of self goods approximately 1 1/2" wide to extend from joining seam to pocket of left front. To have two small uncut buttonholes 1 1/4" apart with the lower buttonhole approximately 1 1/4" above flap.

PIGGY BACK SHOULDER STRAPS

To be die creased to give uniform shape and size. To be sewn into sleevehead seam and measure approximately 2" tapering to 1 3/4" with end pointed. Straps to be made with bottom ply of navy material (Milliken style #7430 2008) . Bottom ply die creased larger to show 1/8" navy material around entire edge of strap. Straps to be set approximately 1" from collar seam. They shall be box stitched to shoulders with a row of cross stitching 2" from sleevehead and diagonally sewn from each end of seam to the sleeve. To be lined with 100% polyester interlining.

COLLAR STAYS

The collar stays shall be of good quality staler vinyl, of proper length.

INTERLININGS

Collar, centerfacing, flaps, and straps will be of 100% polyester interlinings.

SIZE MARKING

Size tab to be sewn in with neck label to the inside yoke of shirt.

BUTTONS

All buttons shall be made from thermosetting polyester material and must match fabric.

PRESSING AND PACKING

Shirts shall be carefully pressed by hand in a first class manner. Shirts to be shipped in strong boxes so as not to be damaged in shipment. Shirts to be packed in individual polyethylene bags.

LADIES SHIRTS

Ladies to have same features as mens except on a ladies pattern.

ZIPPER FRONT SHIRTS

To be YKK separating zipper with nylon coil. matching binder seam, coordinated color for all components, all molded plastic. The zipper is to be sandwiched between fronts and to extend from the second to the sixth buttonhole with the stitch concealed under the center strip.

Southeastern Shirt Code "9" Shirt Specifications
Made In U.S.A.

Mens Long Sleeve Styles Z9101 Navy with Piggy Back Flaps & Straps

FABRIC

Made of 100% Polyester, texurized woven. Weight 7.25 oz per yard. We use the finest fabrics from Burlington Industries and Milliken & Company.

FRONTS

Left front to have a self fabric center pleat 1 1/2" wide extending from collar band to bottom of shirt held down with two rows of stitching. The center pleat to be lined with 100% polyester, 250 denier. Right front to have 1" wide button stay of self fabric extending from collar band to bottom of shirt. Buttons shall be securely attached to the button stay and shall correspond to the buttonholes on the center pleat. There shall be six front and one collar button. The shirt is to have sewn in permanent military creases, 1 in each front and 3 in the back.

COLLAR

The collar and band to be die cut to insure uniformity. The back of the stand is to measure 1 1/2". The points, wide spread, are to be 3 1/4" on length and topstitched 1/4" from edge. The interlinings are to be 100% polyester. Permanent collar stays of proper length are to be sewn inside the collar so that no stitches are made thru the bottom leaf.

YOKE

Two piece yoke of self goods to measure approximately 3 3/4" at bottom center of band.

SLEEVES

To be straight and whole. Sleeve vent shall have a top facing 1 1/4" wide finished at the top with a neatly blocked point. The lower facing to measure 1/2" in width. Sleeve placket to have one button and buttonhole

placed approximately 2 1/2" above the top of cuff. Sleeves must be secured to the body of the shirt by means of an over edge and a safety stitch so as to strengthen the seam. The same stitch must be on the side closing seam as well.

CUFFS

Barrel type cuffs to measure 3" wide with rounded corners and topstitched 1/4" around edge. Buttons on cuff to be evenly spaced as to prevent puckering when fastened. To be die cut for uniformity. Cuffs to be attached to sleeves by double stitching 1/4" apart visible on outside of cuff.

POCKETS

To have two breast pockets with mitred corners to finish 5 1/2" wide and 5 3/4" long. The left breast pocket to have a pencil opening about 1 3/8". Both pockets to have a 1 1/2" box pleat stitched top and bottom to prevent spreading. Velcro placed on edges.

PIGGY BACK FLAPS

Flaps to be die creased to give uniform shape and size. Flaps scoloped, to finish 5 3/4" in width and 2 1/2" in length at the sides, 2 3/4" at the center. Bottom ply to be made of gold material (M J Cahn style #6248 066p) and must be die creased larger to show approximately 1/8" at sides and bottom of flap. Flaps to be secured to front of shirt approximately 1/2" above top of pocket. The left flap to have a pencil opening about 1 3/8" in width. Velcro to be placed on corners of each flap to correspond with velcro on pockets. Flap shall be lined with a good grade and quality interlining.

BADGE TABS

Inside sling type of self goods approximately 1 1/2" wide to extend from joining seam to pocket of left front. To have two small uncut buttonholes 1 1/4" apart with the lower buttonhole approximately 1 1/4" above flap.

PIGGY BACK SHOULDER STRAPS

To be die creased to give uniforms shape and size. To be sewn into sleevehead seam and measure approximately 2" tapering to 1 3/4" with end pointed. Straps to be made with bottom ply of gold material (M J Cahn style #6248 066p). Bottom ply die creased larger to show approximately 1/8" gold material around entire edge of strap. Straps to be set

approximately 1" from collar seam. They shall be box stitched to shoulders with a row of cross stitching 2" from sleevehead and diagonally sewn from each end of seam to the sleeve. To be lined with 100% polyester interlining.

COLLAR STAYS

The collar stays shall be of good quality staler vinyl, of proper length.

INTERLININGS

Collar, centerfacing, flaps, and straps will be of 100% polyester interlinings.

SIZE MARKING

Size tab to be sewn in with neck label to the inside yoke of shirt.

BUTTONS

All buttons shall be made from thermosetting polyester material and must match fabric.

PRESSING AND PACKING

Shirts shall be carefully pressed by hand in a first class manner. Shirts to be shipped in strong boxes so as not to be damaged in shipment. Shirts to be packed in individual polyethylene bags.

LADIES SHIRTS

Ladies to have same features as mens except on a ladies pattern.

ZIPPER FRONT SHIRTS

To be YKK nylon separating zipper with nylon coil, matching binder seam, coordinated color for all components, all molded plastic. The zipper is to be sandwiched between fronts and to extend from the second to the sixth buttonhole with the stitch to be concealed under the center strip.

Southeastern Shirt Code "9" Shirt Specifications
Made In U.S.A.

Mens Short Sleeve Styles Z9201 Navy with Piggy Back Flaps & Straps

FABRIC

Made of 100% Polyester, texturized woven. Weight 7.25 oz. per yard. We use the finest fabrics from Burlington Industries and Milliken & Company.

FRONTS

Left front to have a self fabric center pleat 1 1/2" wide extending from collar band to bottom of shirt held down with two rows of stitching. The center pleat to be lined with 100% polyester, 250 denier. Right and left fronts to have an approximately 3" turn back extending from collar to bottom of shirt. There shall be six front and one collar button. The shirt is to have sewn in permanent military creases, 1 in each front and 3 in the back.

COLLAR

The collar is to be die cut. Convertible collar is to measure 3 1/4" long at points and topstitched 1/4" from edge. The interlinings are to be 100% polyester. Permanent collar stays of proper length are to be sewn inside the collar so that no stitches are made thru the bottom leaf.

YOKE

Two piece yoke of self goods to measure approximately 3 3/4" at bottom center of band.

SLEEVES

Sleeves are to be one piece, have a 1" hem and finish 9 1/2" to 9 3/4" long from the shoulder seam. Sleeve setting and closing shall be done with an overedge and safety stitch. The sleeve is to be bartacked at the hem

POCKETS

To have two breast pockets with mitred corners to finish 5 1/2" wide and 5 3/4" long. The left breast pocket to have a pencil opening about 1 3/8". Both pockets to have a 1 1/2" box pleat stitched top and bottom to prevent spreading. Velcro placed on edges.

PIGGY BACK FLAPS

Flaps to be die creased to give uniform shape and size. Flaps to be scoloped, top ply to finish 5 3/4" in width and 2 1/2" in length at the sides, 2 3/4" at the center. Bottom ply to be made of gold material (M J Cahn style #6248 066p) and must be die creased larger to show approximately 1/8" at sides and bottom of flap. Flaps to be secured to front of shirt approximately 1/2" above top of pocket. The left flap to have a pencil opening about 1 3/8" in width. Velcro to be placed on corners of each flap to correspond with velcro on pockets. Flap shall be lined with a good grade and quality interlining.

BADGE TABS

Inside sling type of self goods approximately 1 1/2" wide to extend from joining seam to pocket of left front. To have two small uncut buttonholes 1 1/4" apart with the lower buttonhole approximately 1 1/4" above flap.

PIGGY BACK SHOULDER STRAPS

To be die creased to give uniform shape and size. To be sewn into sleevehead seam and measure approximately 2" tapering to 1 3/4" with end pointed. Straps to be made with bottom ply of gold material (M J Cahn style #6248 066p) . Bottom ply die creased larger to show 1/8" gold material around entire edge of strap. Straps to be set approximately 1" from collar seam. They shall be box stitched to shoulders with a row of cross stitching 2" from sleevehead and diagonally sewn from each end of seam to the sleeve. To be lined with 100% polyester interlining.

COLLAR STAYS

The collar stays shall be of good quality staler vinyl, of proper length.

INTERLININGS

Collar, centerfacing, flaps, and straps will be of 100% polyester interlinings.

SIZE MARKING

Size tab to be sewn in with neck label to the inside yoke of shirt.

BUTTONS

All buttons shall be made from thermosetting polyester material and must match fabric.

PRESSING AND PACKING

Shirts shall be carefully pressed by hand in a first class manner. Shirts to be shipped in strong boxes so as not to be damaged in shipment. Shirts to be packed in individual polyethylene bags.

LADIES SHIRTS

Ladies to have same features as mens except on a ladies pattern.

ZIPPER FRONT SHIRTS

To be YKK separating zipper with nylon coil. matching binder seam, coordinated color for all components, all molded plastic. The zipper is to be sandwiched between fronts and to extend from the second to the sixth buttonhole with the stitch concealed under the center strip.

MEN'S SHIRT SPECIFICATIONS
Flying Cross by Fechheimer Item: 07W8986Z

FABRIC:

Content:

75% Dacron Polyester / 24% Wool / 1% Lycra

Weight:

9.0 to 9.50 oz. / linear yard

COLOR:


LAPD Blue

STYLE:

To be Flying Cross Model 07W8986Z. Dress style, top center placket front with zipper, full cut tapered fit, banded collar, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Exterior badge holder with metal eyelets. Matching inside yoke and collar band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR & STAND:

Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 3" long, 3/8" minimum width, and to be fused to under side of collar interlining. Stays applied directly to collar material. Stays unacceptable. Collar height at rear 1-1/2". Collar topstitched 1/4" off the edge. Collar stand to measure 1-5/16" at rear and band to be interlined with "Crease N Tack." Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.

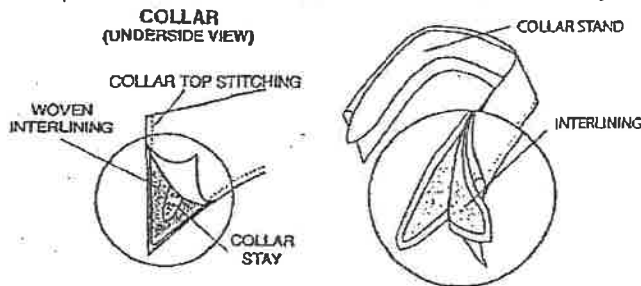


FRONT:

The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be approximately 3-1/4". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15" nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the right front, the balance to be sewn over the buttonholes on the left front.

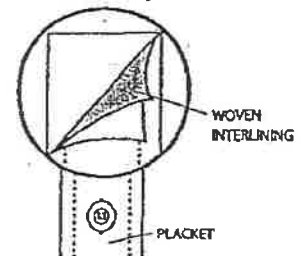

SHOULDER STRAPS:


Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to be interlined with #250 Dacron. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable.

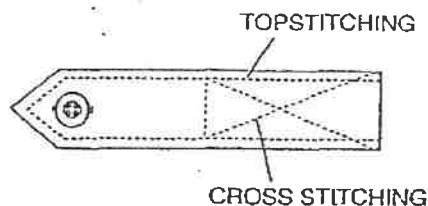

BADGE REINFORCEMENT


Exterior holder to finish 1-1/8" wide by 2-1/4" deep with two metal eyelets positioned vertically 1-1/4" apart with bottom eyelet centered 1-1/4" above left pocket flap.

METAL EYELET BADGE TAB




POCKETS:

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil stitch. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

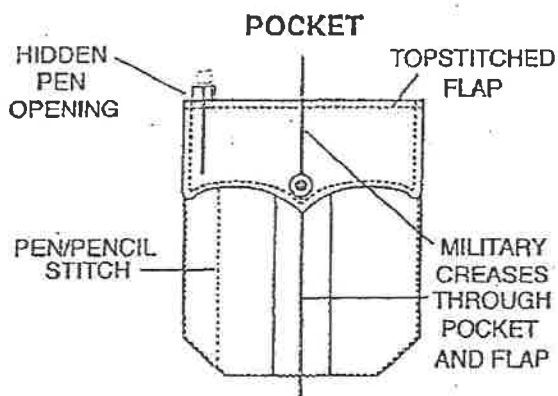

FLAPS:

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole.

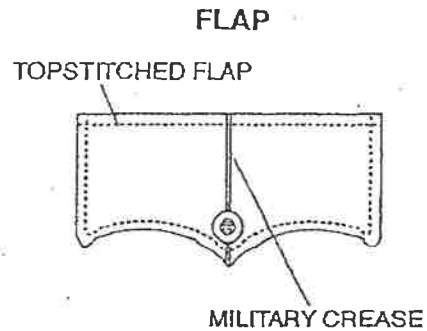


SLEEVES:

Sleeve vent shall be a minimum of 4-1/2" long with one-piece top and bottom facings. Facing to measure 1-1/8" wide point blocked at top.

CUFFS:

Two piece 1/2-inch hemmed cuff with 1/4" topstitching. Cuffs to measure 3" in depth with rounded corners (barrel cuffs). Cuffs to have two buttons and corresponding buttonholes set vertically with one button and buttonhole in center of facing. Cuffs to have woven interlining of #250 Dacron.

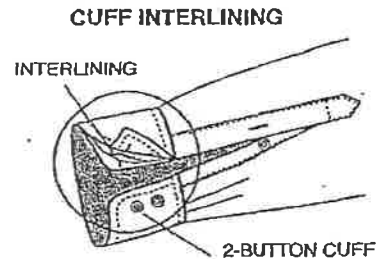

BUTTONS:

First grade 19-ligne pearlescent.

SEWING:

Collar, shoulder straps, pocket flaps and cuffs to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD:

All sewing threads to be color fast polyester wrap to match.

INTERLININGS:

Collar, cuffs, pocket flaps, straps and top center to be interlined with #250 Dacron. Collar band interlining to be Crease-N-Tack.

MILITARY CREASES:

There shall be five sharp silicone military creases on all shirts. One crease on each front to be centered vertically. Front creases shall be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONVERTIBILITY:

This garment shall be designed to accommodate removable metal buttons having eyelets under the sewn buttons on the button front, cuffs, and shoulders. Each pocket will have one vertical eyelet to accommodate removable metal buttons. There are protective pieces on the inside of the garment on the shoulders and cuffs, as well as a reinforcing strip inside the right front.

CONSTRUCTION:

Collars, flaps, shoulder straps, and cuffs are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

COUNTRY OF MANUFACTURE:

Assembled in the U.S.A.

STOCK SIZES:

Shirts must be available in the following sizes:

Sleeve lengths: 32-37 inches

Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22

MEN'S SHIRT SPECIFICATIONS
Flying Cross by Fechheimer Item: 57R8986Z

FABRIC:

Content:

75% Dacron Polyester / 24% Wool / 1% Lycra

Weight:

9.0 to 9.50 oz. / linear yard

COLOR:


LAPD Blue

STYLE:

To be Flying Cross Model 57R8986Z. Dress style, top center placket front with zipper, full cut tapered fit, convertible collar, short sleeves and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Exterior badge holder with metal eyelets. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR:

Convertible collar shall be one piece. Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.

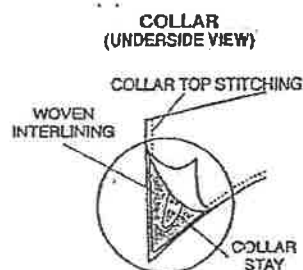


FRONT:

Each front shall have a facing approximately 3" in width. The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back-facing. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be 2-1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15" nylon zipper, to be set below the second button and buttonhole shall accomplish front closure. The top, second and bottom buttons to be attached to the tight front, the balance to be sewn over the buttonholes on the left front.

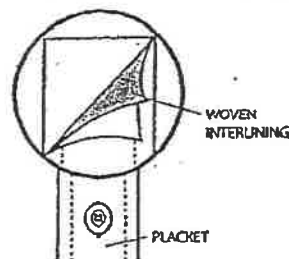

SHOULDER STRAPS:


Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to be interlined with #250 Dacron. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable.

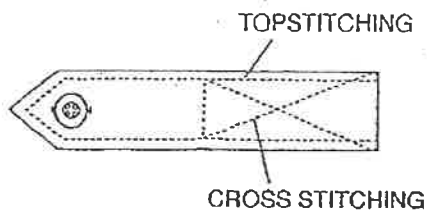

BADGE REINFORCEMENT


Exterior holder to finish 1-1/8" wide by 2-1/4" deep with two metal eyelets positioned vertically 1-1/4" apart with bottom eyelet centered 1-1/4" above left pocket flap.

METAL EYELET BADGE TAB

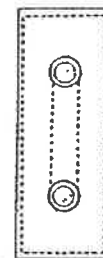


POCKETS:

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil stitch. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

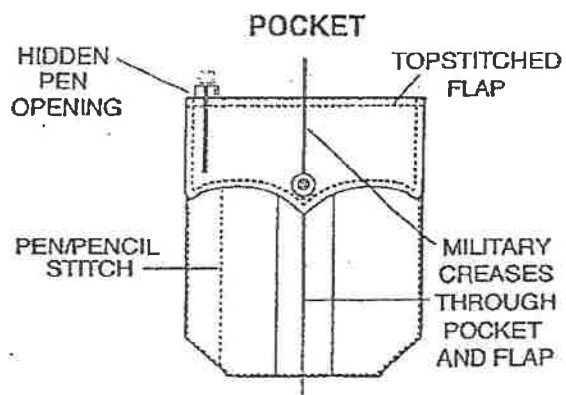

FLAPS:

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole.

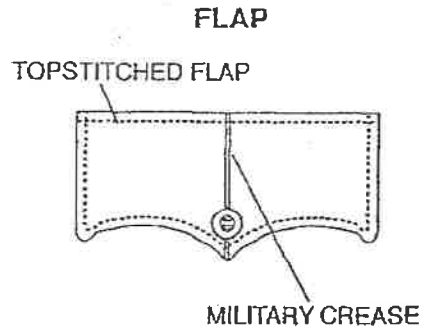

SLEEVES:

Sleeves are to be straight and whole and to have a 3/4" hem and to finish at a minimum of 9 1/2" long from shoulder seam.

BUTTONS:

First grade 19-ligne pearlescent.

SEWING:

Collar, shoulder straps and pocket flaps to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD:

All sewing threads to be color fast polyester wrap to match.

INTERLININGS:

Collar, pocket flaps, straps and top center to be interlined with #250 Dacron.

MILITARY CREASES:

There shall be five sharp silicone military creases on all shirts. One crease on each front to be centered vertically. Front creases shall be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONVERTIBILITY:

This garment shall be designed to accommodate removable metal buttons having eyelets under the sewn buttons on the button front and shoulders. Each pocket will have one vertical eyelet to accommodate removable metal buttons. There are protective pieces on the inside of the garment on the shoulders, as well as a reinforcing strip inside the right front.

CONSTRUCTION:

Collars, flaps and shoulder straps are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

COUNTRY OF MANUFACTURE:

Assembled in the U.S.A.

STOCK SIZES:

Shirts must be available in the following sizes:

Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22

MODEL NUMBER:

To be Fechheimer Brothers #43200

FABRIC:

Raeform Style #32030-30 Weave: Serge - 15-18% Stretch. Weight: 12.5-13.0 oz. per linear yard. Fiber Content: 74% Dacron Polyester 25% Wool Worsted 1% Lycra. Breaking Strength: 190 Pounds in the Warp 150 Pounds in the Filling. Construction: 84 ends per inch 63 picks per inch. Fiber Length: Wool: 3-3.5 inches average minimum Poly: 3 inches minimum. Dye Procedure: Piece Dyed. COLOR: NAVY

DESIGN:

Trouser shall be manufactured from a men's uniform trouser pattern. The trouser styling shall incorporate a plain front, two quarter top front pockets, two hip pockets and watch pocket. Trouser is straight leg style.

POCKETING:

The pocketing shall be 70% Polyester / 30% Cotton, 2.9 oz. per square yard (60" width) with a minimum 78 X 64 count. Pocketing must have a durable press finish and the color of the pocketing must be black.

POCKET DESIGN:

The two (2) front pockets will be quarter top style with a minimum opening of 6" and a minimum depth of 5 3/4" measured from the bottom of the opening. Front pockets to have straight bartacks (use of triangle bartacks will be cause for rejection) at the top and bottom of pocket openings. Pockets shall be constructed using the stitch, turn, and topstitch method. Pocket facings to be made of the basic fabric and must measure a minimum of 3" in width at the top.

The two (2) hip pockets shall have a minimum opening of 5 1/2" and a minimum depth of 5 3/4" measured from the bottom of the pocket opening. Hip pockets shall be constructed using the double welt method on a REECE PW Machine. The welts shall be finished in such a manner that there is no topstitching (topstitched hip pocket welts shall be cause for rejection). The corners of the hip pocket openings shall have firm straight bartacks for reinforcement (triangle bartacks are unacceptable). Hip pocket facings to be made of basic fabric and have a minimum depth of 3/4". The left hip pocket shall have a centered tab made of basic cloth inserted into the top welt with bartacks at the top and bottom of the tab to form an opening for a button. A button shall be located below the bottom welt corresponding in location with the tab.

The watch pocket shall be located on the right front at the waistband. This pocket shall have a minimum opening and depth of 2 3/4". The front of the pocket shall be made of pocketing fabric and the back of the pocket shall be made of basic fabric and the two pieces are securely stitched together. Each corner of the pocket opening shall have firm straight bartacks.

WAISTBAND:

The trouser will be made with the Freedom Fit II® waistband system, which is designed to provide the wearer with a more comfortable and better fitting trouser. Freedom Fit II® waistband lining is constructed using the "closed method" and shall measure 2" wide when finished. The waistband closure shall be accomplished with a crush proof hook and eye. The hook and eye shall be reinforced with stays made of a non-woven fabric that are anchored by the topstitching for the fly facing and curtain. This topstitching must be to the top of the waistband. The waistband must be topstitched 1/16" below the waistband seam for added strength. The top portion of the inside of the waistband is to consist of the same fabric as used for pocketing (70% polyester 30% cotton - minimum 80 X 62 (+/-) 2 count). The fabric is to be cut on the bias for maximum comfort. To be 1 3/4" wide and to finish 1 1/8" wide after construction.

WAISTBAND:

Upper waistband curtain to be inner lined with stretch Ban-Rol canvas. The waistband lining is composed of which give it a two zone comfort fit and breath ability. The top part of the waistband has two functions, it stabilizes the waistband and prevents waistband rollover and allows for a comfort stretch when the wearer bends or sits. This elastic is constructed with an open weave to allow for breath ability around the waist. The specifications for the upper elastic are as follows:

Width:	1 1/2"
Overall Content:	38% Polyester, 45% Nylon, 17% Spandex
Stretch:	20%

The lower part of the waistband is designed to stretch over the hips for comfort and also aid in keeping the slack positioned properly on the waist. This elastic is woven with an open weave for maximum breath ability around the lower waist. The lower elastic portion of the band has an area of exposed Neoprene rubber which acts as a shirt keeper. The specifications for the lower elastic are as follows:

Width:	1 3/4"
Overall Content:	13% Polyester, 49% Nylon, 16% Spandex, 22 % Rubber
Stretch:	50%

Note: In a performance stretch waistband, the upper and lower portion of the band will perform different functions.

The upper portion should allow a comfort fit at the waist when bending or sitting, and must maintain a crisp, clean appearance at the outer waistband. This part of the band will stretch 20% and be firm enough to prevent waistband rollover.

The bottom portion of the waistband stretches over the hip to give support to the lower back and abdomen. In addition, this high stretch portion of the band should constantly be pressed up by the hips, preventing the slack from slipping down while being worn, even if heavy keys, change, or other items are carried in the pockets or on the belt.

The three (3) rubberized strands ensure that shirts stay tucked in for neat appearance.

FLY:

Trouser shall have a metal memory lock zipper. There shall be a French Fly tab closure on the inside of the right fly. The tab shall be double ply made of the basic cloth (tabs made of pocketing material or a "grown on" French Fly will be cause for rejection). The right fly shall be lined with the same fabric as the waistband curtain and pocketing. The fly lining shall be sewn to the left fly below the zipper in a neat and durable manner. A button shall be located on the left fly corresponding with the French Fly tab to provide a clean and comfortable closure. There shall be a firm straight bartack at the bottom of the fly going through the zipper tape.

BELT LOOPS:

There shall be a minimum of seven belt loops 3/4" in width of double thickness. Each loop must have a non-woven interlining. All loops (except for the back center loop) must be sewn into the bottom of the waistband ("dropped" belt loops are cause for rejection) and the top of the belt loops shall be caught into the waistband curtain seam with a Rocap machine. The bottom of the center back loop shall be tacked to the trouser and the top of the loop tacked to the outside of the waistband.

CROTCH LINING:

A crotch liner shall be basted into the seam allowance at the crotch on each leg and sewn in during final assembly.

SEAT:

Seat outlet to measure a minimum of 2 3/4" to allow for alterations. Seat must be sewn with a Tandem Needle Machine.

LINTRAK CREASES:

Trouser legs shall incorporate front and back lintrak silicone creases (applied to the trouser crease for the permanent life of the garment).

STITCHING, PRESSING & FINISHING:

Trouser must be stitched with matching thread and all stitching to show must be 10-11 stitches per inch. Trouser must be neatly pressed on Hothead Presses and properly shaped. Outseams and inseams must be pressed open. Trouser must be cleaned and finished to eliminate loose threads.

LABELS:

Trouser must have a care label permanently affixed that also indicates the size. A paper ticket showing the size, fabric content, cut number, and WPL number must be on the outside of the waistband. Garment must be made in the United States of America and bear a union label.

STOCK SIZES:

Trouser must be available from stock in the following sizes:

REGULAR RISE: 28 - 50 (EVEN SIZES ONLY ABOVE 38)

SHORT RISE: 28 - 40 (EVEN SIZES ONLY)

OPELOUSAS POLICE DEPARTMENT
REVERSIBLE RAINCOAT
COLOR: Black reversing to Hi-vis Yellow
DATED: March 2007

GENERAL REQUIREMENTS

1. Failure to complete the compliance questions following each section below will result in automatic rejection of such bids as non-responsive.
2. All garment details not specifically described herein, tailoring, styling, construction, materials, and components must match the standard reference sample.
3. Pre-bid samples required at the time of the bid opening.
4. Samples may be subjected to laboratory testing at the discretion of the contracting officer. Bidders are responsible for all testing costs of their sample garments.
5. Bidders must enclose evidence (dated manufacturers catalogs or similar) that this item is currently a commercial in-stock style. The successful bidder will provide a full size run of try-on garments within 10 days for agency approval.
6. Garments will have a warranty covering (at minimum) defects in materials and workmanship for three (3) years.
7. Garments must meet ANSI/ISEA 107-2004 class II requirements.
8. Garments must be manufactured to ISO 9001 quality assurance standard. (AG0900)

COMPLY: ☐ Yes ☐ No

SHELL FABRIC

9. 100% Polyester Oxford 300Dx300D PU visible coating 2000mm waterproofness 3000gm MVP; shall resist oil, discoloration and be odor free. (Color: see specified garment color)
10. 100% Nylon Oxford 200Dx200D PU clear coating 2000mm waterproofness 3000gm MVP; shall resist oil, discoloration and be odor free. (Color: see specified garment color)

COMPLY: ☐ Yes ☐ No

TRIM

11. Eyelets: 3L matt. (Color: black)
12. Hook and loop: woven nylon base. (Color: black)
13. Plastic fastener: 100mm translucent plastic pin.
14. Reflective trim: 2 inch wide, 3M Scotchlite™ silver reflective fabric on 2.5 inch wide black ribbon.
15. Seam tape: waterproof seam-sealing tape, 1.0 inch in width compatible with the coating compound.
16. Snaps: non rusting reversible and regular, 24 ligne, gun metal finish nickel on brass, heavy duty closure, black nylon cap.
17. Front zipper: vislon, two way, 29 inches. (Size L/Reg, Color: black)

COMPLY: ☐ Yes ☐ No

DESIGN AND CONSTRUCTION

18. B.Dry waterproof, windproof, breathable raincoat.
19. ANSI/ISEA 107 Class II certified.
20. Adjustable cuffs with hook and loop closure.
21. Double storm fly front with reversible delrin zipper.
22. Hi-contrast Scotchlite™ reflective trim around chest, sleeves and cuffs.
23. One-piece collar and sleeves.
24. Quick dry taffeta pockets.
25. Raglan drop shoulder for unrestricted movement.
26. Reversible hook and loop sleeve adjustment.
27. Reversible to high-visibility color.
28. Sport collar zips to top.
29. Two 10-inch welt style cut through pockets for access to equipment.
30. Badge tabs on both sides.
31. Microphone tabs on left front and right front of both dark and hi-vis sides.

COMPLY: ☐ Yes ☐ No

CUSTOMIZATION (OPTIONAL)

- 32. Snap-off hood
- 33. Optional upgrade to ANSI Class III with 2" reflective stripe added above hem
- 34. Stock or custom graphics
- 35. Name tab

COMPLY: ☐ Yes ☐ No

STANDARD SIZE RANGE

- 36. Unisex:
 - a. Regular: XS - 3XL
 - Tall: M - 3XL

COMPLY: ☐ Yes ☐ No

MEASUREMENTS

- 37. Unisex: Regular length, Size: Large
 - a. Chest: 56 (plus or minus 0.75 inches)
 - b. Sweep: 56.25 (plus or minus 0.75 inches)
 - c. Back Length 48 (plus or minus 0.75 inches)
 - d. Sleeve Inseam 18.5 (plus or minus 0.5 inches)

COMPLY: ☐ Yes ☐ No

OPELOUSAS POLICE DEPARTMENT
REVERSIBLE RAIN JACKET
COLOR: Black reversing to Hi-vis yellow
DATED: March 2007

GENERAL REQUIREMENTS

1. Failure to complete the compliance questions following each section below will result in automatic rejection of such bids as non-responsive.
2. All garment details not specifically described herein, tailoring, styling, construction, materials, and components must match the standard reference sample.
3. Pre-bid samples required at the time of the bid opening.
4. Samples may be subjected to laboratory testing at the discretion of the contracting officer. Bidders are responsible for all testing costs of their sample garments.
5. Bidders must enclose evidence (dated manufacturers catalogs or similar) that this item is currently a commercial in-stock style. The successful bidder will provide a full size run of try-on garments within 10 days for agency approval.
6. Garments will have a warranty covering (at minimum) defects in materials and workmanship for three (3) years.
7. Garments must be ANSI/ISEA 107-2004 Class II certified by an Independent laboratory.
8. Garments must be manufactured to ISO 9001 quality assurance standard. (AG0900)

COMPLY: ___Yes ___No

SHELL FABRIC

9. 100% Polyester Oxford 300Dx300D PU visible coating 2000mm waterproofness 3000gm MVP; shall resist oil, discoloration and be odor free. (Color: see specified garment color)
10. 100% Nylon Oxford 200Dx200D PU clear coating 2000mm waterproofness 3000gm MVP; shall resist oil, discoloration and be odor free. (Color: see specified garment color)

COMPLY: ___Yes ___No

TRIM

11. Eyelets: 3L matt (Color: black)
12. Hook and loop: woven nylon base. (Color: black)
13. Plastic fastener: 100mm translucent plastic pin.
14. Reflective trim: 2 inch wide, 3M Scotchlite™ silver reflective fabric on 2.5 inch wide black ribbon.
15. Seam tape: waterproof seam-sealing tape, 1.0 inch in width compatible with the coating compound.
16. Snaps: non rusting reversible and regular; 24 ligne, gun metal finish nickel on brass, heavy duty closure, black nylon cap.
17. Front zipper: vislon, two way, 25inches. (Size L/Reg, Color: black)

COMPLY: ___Yes ___No

DESIGN AND CONSTRUCTION

18. B.Dry waterproof, windproof, breathable raincoat.
19. ANSI/ISEA 107 Class II certified.
20. Reversible side zippers for equipment access with snap tab closures at bottom.
21. Double storm fly front with reversible delrin zipper.
22. Hi-contrast Scotchlite™ reflective trim around chest, upper sleeves and cuffs.
23. One-piece collar and sleeves.
24. Quick dry taffeta pockets.
25. Raglan drop shoulder for unrestricted movement.
26. Reversible hook and loop sleeve adjustment.
27. Reversible to high-visibility color.
28. Sport collar zips to top.
29. Two 8-inch welt style cut through pockets for access to equipment.
30. Badge tabs on both sides.

31. Microphone tabs on left front and right front of both dark and hi-vis sides.

COMPLY: ☐ Yes ☐ No

CUSTOMIZATION (OPTIONAL)

32. Snap-off hood

33. Upgrade to ANSI Class III with 2" reflective stripe added above hem

34. Stock or custom graphics

35. Name tab

COMPLY: ☐ Yes ☐ No

SIZE RANGE

36. Unisex:	Regular:	XS - 3XL
	Tall:	M - 3XL

COMPLY: ☐ Yes ☐ No

MEASUREMENTS

37. Regular Length: Size: L

a. Chest:	54	(plus or minus 0.75 inches)
b. Back Length:	32	(plus or minus 0.75 inches)
c. Sleeve Inseam:	18.5	(plus or minus 0.25 inches)

COMPLY: ☐ Yes ☐ No

OPELOUSAS POLICE DEPARTMENT
DEFENDER RAIN PANT

COLOR: BLACK

DATE: March 2007

GENERAL REQUIREMENTS

1. Failure to complete the compliance questions following each section below will result in automatic rejection of such bids as non-responsive.
2. All garment details not specifically described herein, tailoring, styling, construction, materials, and components must match the standard reference sample.
3. Pre-bid samples required at the time of the bid opening.
4. Samples may be subjected to laboratory testing at the discretion of the contracting officer. Bidders are responsible for all testing costs of their sample garments.
5. Bidders must enclose evidence (dated manufacturers catalogs or similar) that this item is currently a commercial in-stock style. The successful bidder will provide a full size run of try-on garments within 10 days for agency approval.
6. Garments will have a warranty covering (at minimum) defects in materials and workmanship for three (3) years.
7. Garments must be manufactured to ISO 9001 quality assurance standard. (AG0904)

COMPLY: Yes No

SHELL FABRIC

8. 100% Polyester Oxford 300Dx300D PU clear coating 2000mm waterproofness 3000gm MVP; shall resist oil, discoloration and be odor free. (Color: see specified garment color)

COMPLY: Yes No

TRIM

9. Cordlock: plastic cordlock. (Color: black)
10. Elastic band: 1 inch elastic webbing. (Color: natural)
11. Elastic cord: 3mm elastic draw cord. (Color: black)
12. Plastic fastener: 100mm translucent plastic pin.
13. Seam tape: waterproof seam-sealing tape, 1.0 inch in width compatible with the coating compound.
14. Snaps: non rusting, 24 ligne, gun metal finish nickel on brass, heavy duty closure, black nylon cap.
15. Leg zipper: coil, size #5, 17 inches. (Size L/Reg, black)

COMPLY: Yes No

DESIGN AND CONSTRUCTION

16. **B.Dry waterproof, windproof, breathable pant.**
17. **Elasticized back waistband and snap-over side vent openings.**
18. **Zippered leg openings with adjustable cuffs.**

COMPLY: Yes No

CUSTOMIZATION

19. Scotchlite™ - 2" Scotchlite™ applied to bottom of cuff.
20. Suspenders
21. B.Dry waterproof, windproof, breathable zip out liner.

COMPLY: ☐ Yes ☐ No

STANDARD SIZE RANGE

22. Unisex: Regular: XS - 2XL
Tall: M - XL

COMPLY: ☐ Yes

☐ No

MEASUREMENTS

23. Regular Length: Size: L

- a. Outseam: 43.5 (plus or minus 0.75 inches)
- b. Inseam: 29 (plus or minus 0.75 inches)
- c. Seat: 52 (plus or minus 0.75 inches)

COMPLY: ☐ Yes

☐ No

OPELOUSAS POLICE DEPARTMENT
WAIST-LENGTH JACKET WITH B.DRY FABRIC

COLOR: Dark Navy

DATE: March 2007

9810Z

GENERAL REQUIREMENTS

1. Failure to complete the compliance questions following each section below will result in automatic rejection of such bids as non-responsive.
2. All garment details not specifically described herein including tailoring, styling, construction, materials, and components must match the standard reference sample.
3. Pre-bid samples are required at the time of the bid opening.
4. Samples may be subjected to laboratory testing at the discretion of the contracting officer. Bidders are responsible for all testing costs of their sample garments.
5. Bidders must enclose evidence (dated manufacturers catalogs or similar) that this item is currently a commercial in-stock style. The successful bidder will provide a full size run of try-on garments within 10 days for agency approval.
6. All products will have a printed warranty hangtag covering (at minimum) defects in materials and workmanship for three (3) years.
7. Garments must be manufactured to ISO 9001 quality assurance standard. (AG2200)

COMPLY ☐ Yes ☐ No

SHELL FABRIC

8. Matrix Fabric: 70 Denier warp and 140 denier filling 100% Nylon Ripstop weave. Honeycomb pattern printed urethane non-ravel backcoating to insure breathability, prevent seam slippage, and to maintain shell fabric appearance. (Color: see specified garment color)

COMPLY ☐ Yes ☐ No

LINING FABRICS

9. The permanent waterproof-breathable lining shall consist of a B.DRY waterproof-breathable membrane laminated to a woven nylon taffeta fabric resulting in a dry cleanable and washable waterproof material. 100% nylon, 70 denier warp and 2-ply 70 denier filling.
10. Removable Insulated Liner: 6 inch diamond pattern quilted insulation package. 1.85 oz. per square yard, 100% Nylon 70 denier ripstop woven face fabric (Color: charcoal). Thermolite Plus or B.Warm BSCL-100 insulation for sleeves and BSCL-200 for body. 1.8 oz. per square yard, 100% Nylon 70 denier plain weave taffeta backing fabric (Color: black). Fiber migration resistant construction and treatment with no added layers of scrim. Machine washable/dryable, dry cleanable, and can be pressed. Shrinkage less than 2%.

COMPLY ☐ Yes ☐ No

TRIM

11. Brushed pocketing: 100% polyester tricot. (Color: black)
12. Pocketing: 65% polyester 35% cotton. (Color: black)
13. Interlining: 100% polyester non-woven.
14. Binding: 100% nylon 70 denier taffeta plain weave.
15. Elastic: Spandex, knitted elastic, dry cleanable
16. Metal Uniform Buttons: 24 ligne nickel
17. Ribbon Loops: 0.5 inch grosgrain (Color: Black)
18. Reflective Trim: 1 inch wide 3M's Scotchlite silver reflective fabric.
19. Seam Tape: waterproof seam sealing tape compatible with the permanent waterproof-breathable lining. (Color: Clear)
20. Zippers:
 - a. Front zipper: delrin, one-way, size #5, 24 inches
 - b. Sleeve underarm zippers: nylon coil, one-way, size #3, 10 inches
 - c. Inside pocket zipper: nylon coil, one-way zipper, size #3, 6.5 inches
 - d. Liner zipper: delrin, one-way, size #3, 46 inches

- e. Removable sleeve liner zippers: deirin, one-way, size #3, 10 inches
 - f. Side vent zipper: nylon coil, one-way, size #5, 9.5 inches
(Zipper lengths specified are for size L/Reg Color: Black)
21. Snaps: 20 ligne prong style with closed backs, gunmetal finish on brass, heavy-duty closure, 24-ligne nylon cap. (Color: Black)
22. Hook and Loop: woven nylon base (Color: Black).
23. Eyelets: aluminum (Color: Black)

COMPLY ☐ Yes ☐ No

DESIGN AND CONSTRUCTION

24. Waterproof by design style.
25. Waist length with shirred back waistband.
26. Front zipper closure covered by double storm flaps.
27. Storm collar.
28. Zip-out full body and sleeve quilted insulated liner.
29. Drop shoulder.
30. Elasticized cuff with hook and loop cuff closure.
31. Underarm sleeve zippers.
32. Zippered side openings with elasticized snap tabs.
33. Double entry lower pockets with flaps.
34. Inside zippered security pocket.
35. Badge holder on left breast.
36. Hidden Scotchlite safety package.
37. Permanent epaulets with 24 ligne metal buttons.

COMPLY ☐ Yes ☐ No

CUSTOMIZATION

38. Emblem(s): supplied by agency, sewn on as specified
39. Name Tab
40. Hood
41. Microphone Tab

COMPLY ☐ Yes ☐ No

STANDARD SIZE RANGE

42. Unisex: Short: XS - L
 Regular: S - 3XL
 Tall: M - 3XL

COMPLY ☐ Yes ☐ No

MEASUREMENTS

43. - Unisex Regular Length: Size L
- | | | |
|-----------------|------|-----------------------------|
| a. Chest: | 54 | (plus or minus 0.75 inches) |
| b. Sleeve: | 37 | (plus or minus 0.5 inches) |
| c. Back Length: | 24.5 | (plus or minus 0.75 inches) |

COMPLY ☐ Yes ☐ No

SPECIFICATIONS FOR STRAW CAMPAIGN HAT

GENUINE MILAN STRAW LAWMAN TRIPLE BRIM NAVY BLUE

5-5.5mm BRAID SEWN TIGHTLY TOGETHER EXTRA STIFF.

3" FLAT TRIPLE BRIM EXTRA HEAVY

FOUR DENT CREASE WITH ONE EYELET CENTERED ON EACH DENT

CUSHION COMFORT SWEATBAND, 12 LIGNES BAND, SIDE BOW

5/8" BRIM EYELETS SET ON EACH SIDE OF HAT TO ACCOMMODATE

LEATHER STRAP

EACH HAT TO HAVE GOLD ACORN STRAP

2 PIECE SWIVEL STRAP.